


ROHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE
△3*2	D	ECN # 101230-34 EDIT LABEL,POLYBAG	01/03/11'

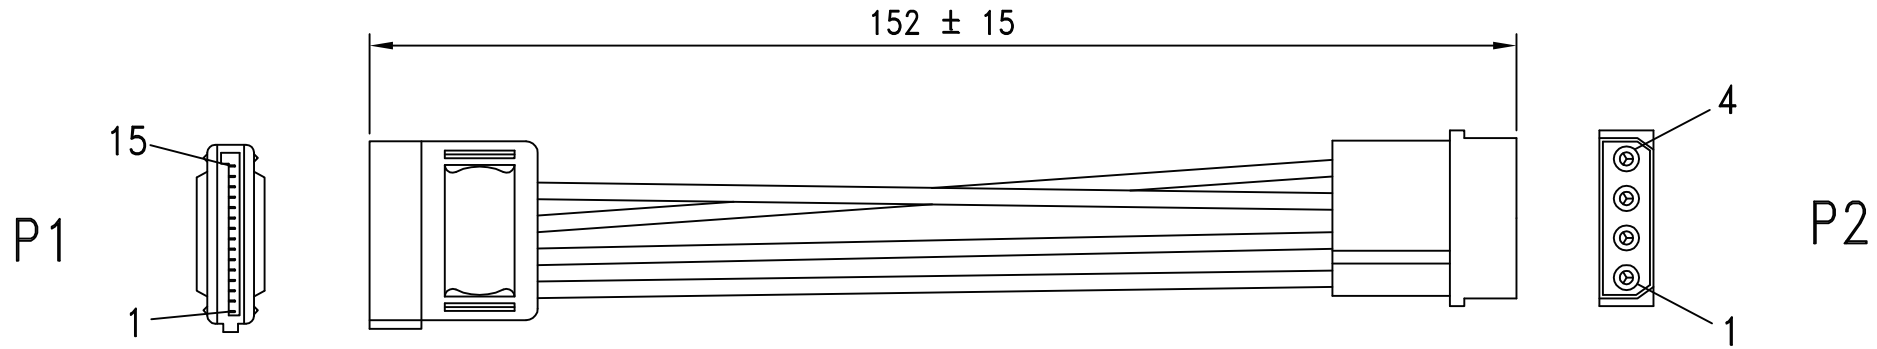

NOTE:

1. HOOK UP WIRE : UL1007 18AWG COLOR:YELLOW, BLACK, RED

2. CONNECTOR :

P1 : 15 PIN SATA SOCKET CRIMP TYPE GOLD PLATED 15u" CONTACT

P2 : 4 PIN MATE LOCK MALE . △2

HOUSING: JWT P/N: C5081H02-4P

TERMINAL: JWT P/N: C5081T0B-2 .

3.HOOD: P1: MOLDED TYPE, PVC 45P, COLOR:BLACK(NK-K01)

4.ELECTRICAL TEST: <1>100% OPEN SHORT & MIS WIRE TEST.

<2>CONTACT RESISTANCE 3 Ohms MAX

<3>INSULATION RESISTANCE 10M Ohms MIN

5.PACKING:SEE P-0210 PACKING DRAWING


△1 △2 EACH PC POLYBAG+EAN CODE LABEL(EAN 13)

P1		P2
1, 2, 3	<u>YELLOW</u>	1
4, 5, 6	<u>BLACK</u>	2
7, 8, 9	<u>RED</u>	4
10, 11, 12	<u>BLACK</u>	3

Tolerance Inch M/M			2Direct GmbH			
.X	.015	.30				
.XX	.010	.10	Title			
.XXX	.005	.05	SERIAL ATA POWER SUPPLY CABLE			
Draw FANNIE 01/03/11'			Customer P/N: CS0003			
Check			App'd		Customer	
Engr			Scale	NONE	Units	m/m
			Third Angle Projection		⊕	
			Dwg No. 150-0752		REV:D	Sheet 1/2

LTR	REV.	DESCRIPTION	DATE
3*2	D	ECN # 101230-34 EDIT LABEL,POLYBAG	01/03/11'


POLYBAG 

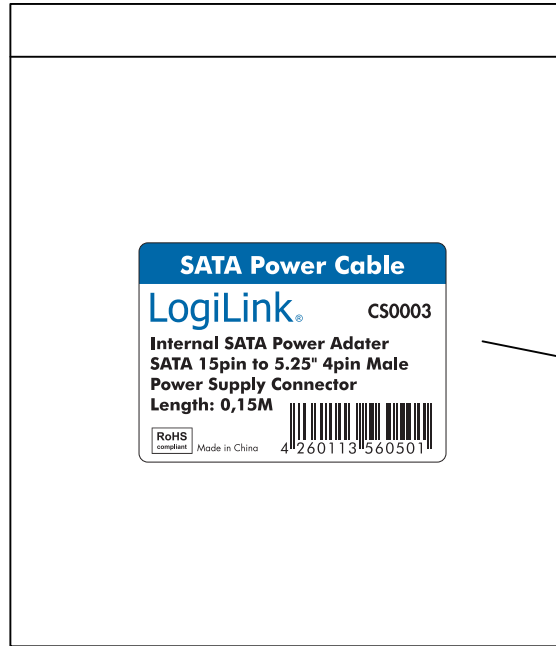


LABEL POSITION IN THE MIDDLE

BAR CODE LABEL 

70mm

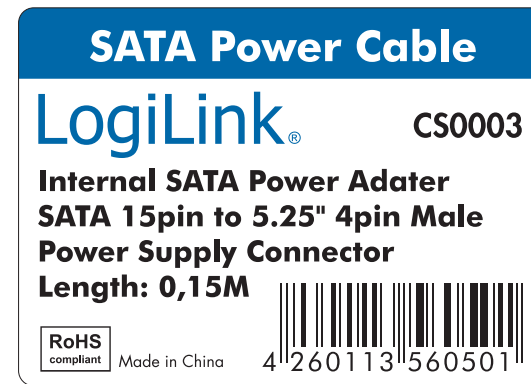

Pantone 2945C, Black
Size: 70 x 50 mm R= 2mm

Tolerance Inch M/M			2Direct GmbH			
.X	.015	.30				
.XX	.010	.10	Title			
.XXX	.005	.05	SERIAL ATA POWER SUPPLY CABLE			
Draw FANNIE 01/03/11'			Customer P/N: CS0003			
Check			App'd		Customer	
Engr			Scale	NONE	Units	m/m
			Third Angle Projection 		Dwg No. 150-0752	
			REV: D		Sheet 2/2	